

STANDARD FEATURES


- Low weight cast aluminum construction.
- Quiet operation with integral inlet and outlet muffling.
- Recognized TEFC - cURus motor.
- High efficiency / low noise impeller design.
- No lubrication / maintenance required.
- Allowed ambient: +5 °F to +104 °F.
- Mountable in any plane.

OPTIONS

- Special voltages.
- Surface treatment or plating.
- Gas tight sealing.
- Special designs available.

ACCESSORIES

- Inlet and/or inline filters.
- Additional inlet/outlet silencers.
- Safety valves.
- Flow converting devices.
- Optionals connectors






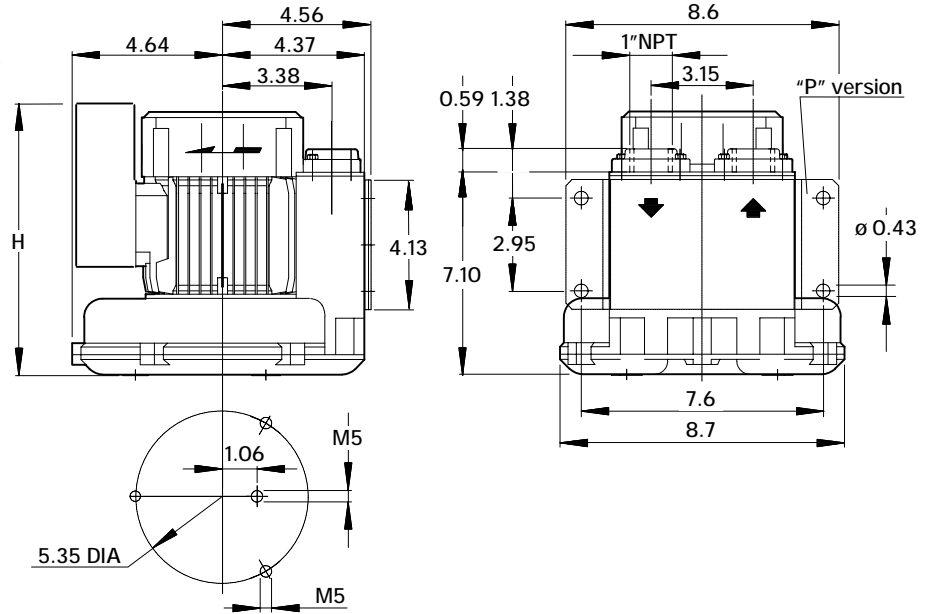


Dimensions in inches.
Dimension for reference only.

| Model | Maximum flow Scfm | | Installed power Hp | | Maximum differential pressure Δp (In WG) | | Noise level Lp dB (A) (1) | | Overall dimensions H Inches | Weight Lbs |
|-------|----------------------|-------------------|-----------------------|-------------------|---|-------------------|---------------------------------|-------------------|-----------------------------------|---------------|
| | 60 Hz 3500 rpm | 50 Hz 2900 rpm | 60 Hz 3500 rpm | 50 Hz 2900 rpm | 60 Hz 3500 rpm | 50 Hz 2900 rpm | 60 Hz 3500 rpm | 50 Hz 2900 rpm | | |
| 06 | 39 | 32 | 1/3 | - | 36 | - | 58.7 | - | 10.60 | 18.30 |
| | | | 1/2 | 1/2 | 52 | 36 | 59.0 | 58.0 | 10.60 | 18.50 |

(1) Noise measured at 1 m distance with inlet and outlet ports piped, in accordance to ISO 3744.

- For proper use, the blower should be equipped with inlet filter and safety valve; other accessories available on request.
- Ambient temperature from +5° to +104°F.
- Specifications subject to change without notice.

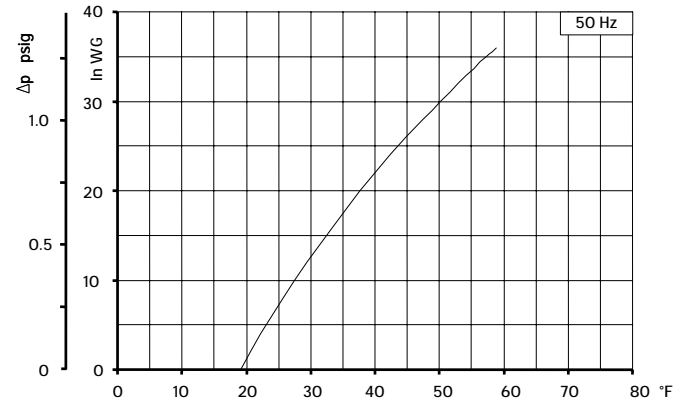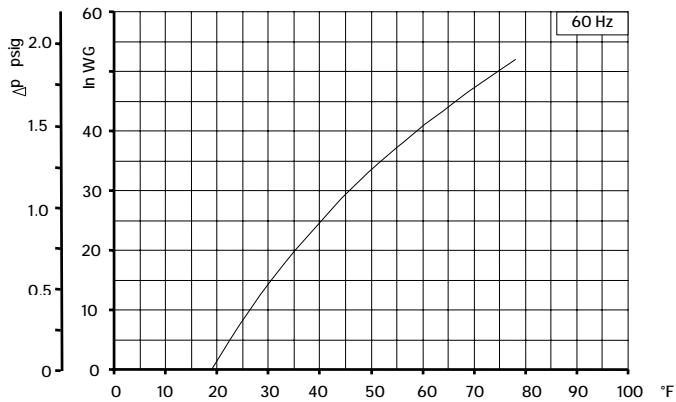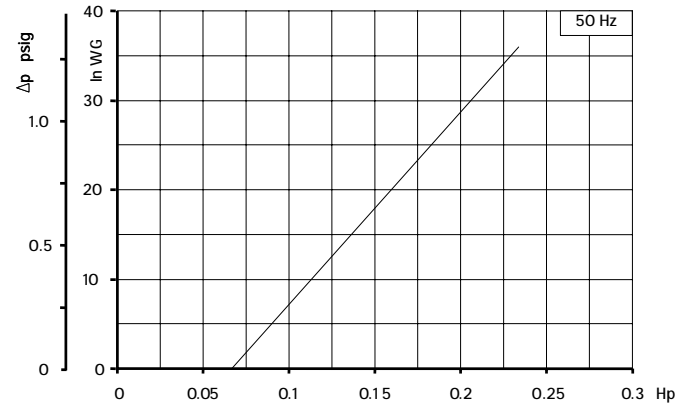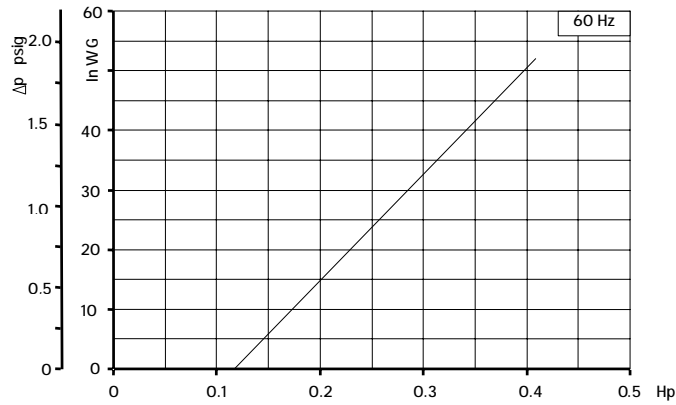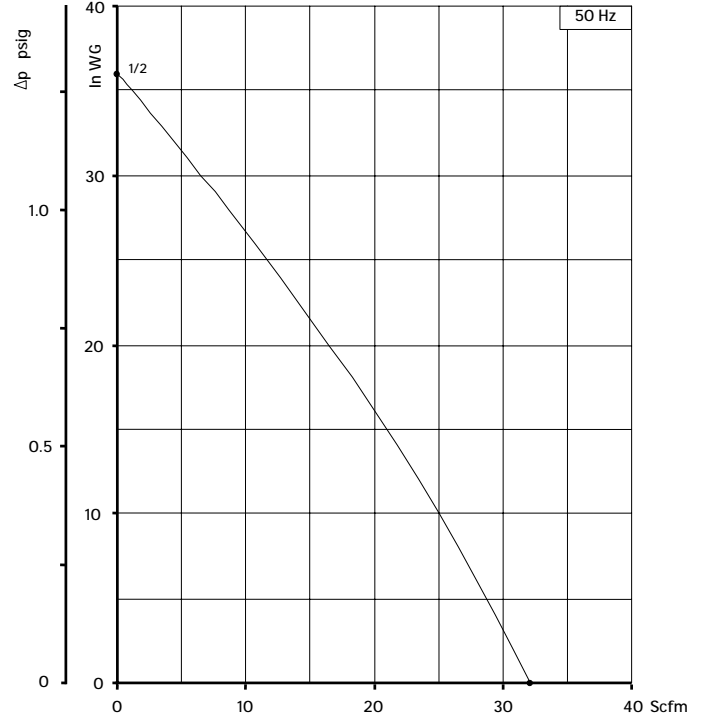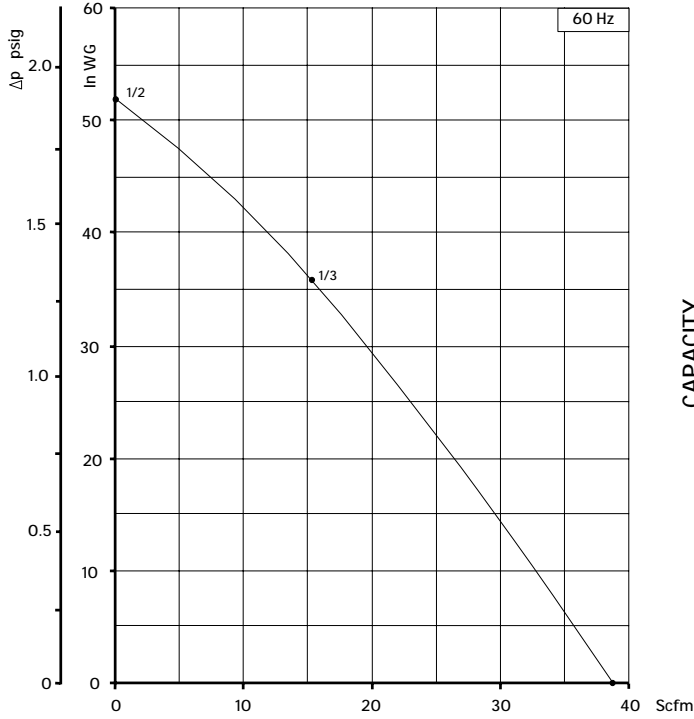

Curves refer to air at 68°F temperature and 29.92 In Hg atmospheric pressure (abs) measured at inlet port.
Values for flow, power consumption and temperature rise: +/-10% tolerance.
Data subject to change without notice.